

# 5" Fireproof Wall Mount Speaker (6W-12W-24W) DS-EN-06

## Feature:

- Compliant with the EN54-24 standards
- Commercial fireproof wall mount speaker with 100V/70V transformer
- Ideal for school, office, hotel and airport voice evacuation and PA system
- Rated power output 6W-12W-24W at 100V
- 5" full range driver unit
- Line input 100V or 70V with transformer
- Ceramic connector, fire dome, 95°C fire-resistant cable and thermal fuse
- Steel enclosure, steel grille and fire dome in white
- Wall mount or surface mount quick installation by screw hole




**EN54-24**

## Specification:

Model	DS-EN-06
Description	EN54-24 Wall Mount Speaker
Rated Power Output	6W-12W-24W
Line Input	100V or 70V
Frequency Response	120-10KHz
SPL(@1W/m)	105dB/ 97dB (SPL)
Speaker Unit	5" full range driver unit
Dimension	185×185×73mm
Material	Steel enclosure, steel grille and fire dome in white
Mounting Way	Quick installation by hanging screw hole
Weight	1.4kg

## Dimension & Side View:

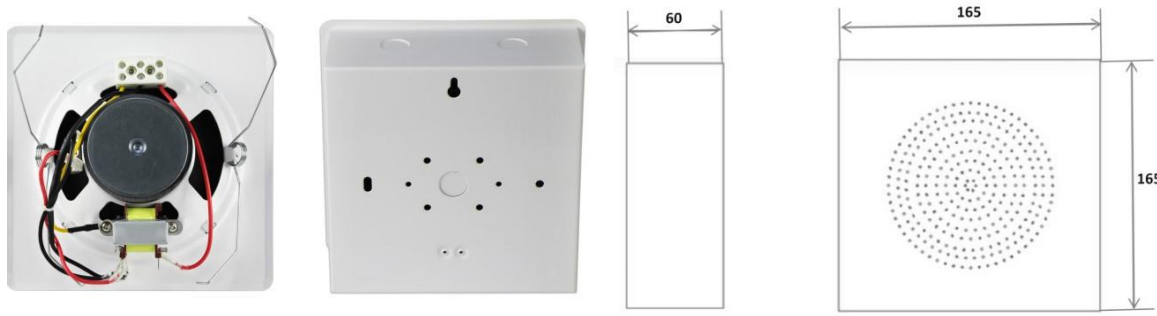

## Frequency Response VS SPL:

